

Latches adjustable fastening holes accessible

Item description/product images



Description

Material:

Steel or stainless steel 1.4301.

Version:

Steel trivalent blue passivated.

Stainless steel bright.

Note:

Adjustable latches are secure locking systems for industrial applications. By exceeding the dead centre they resist vibration.

After the hook is engaged with the catch plate, the parts to be locked can be drawn together by up to 5 mm by pushing the lever down.

To compensate for tolerances or to create enough tension, the hook length can be adjusted using the M5 threaded spindle.

The latches can be screwed down or riveted.

Any catch plate can be combined with any latch.

Order required catch plate version separately.

The retaining force F1 applies to the latch, not the catch plate.

Drawing reference:

Form A standard


Form B with safety catch

Form C with padlock bracket

1) Hole arrangements for assembly with catch plate

Latches adjustable fastening holes accessible

Drawings

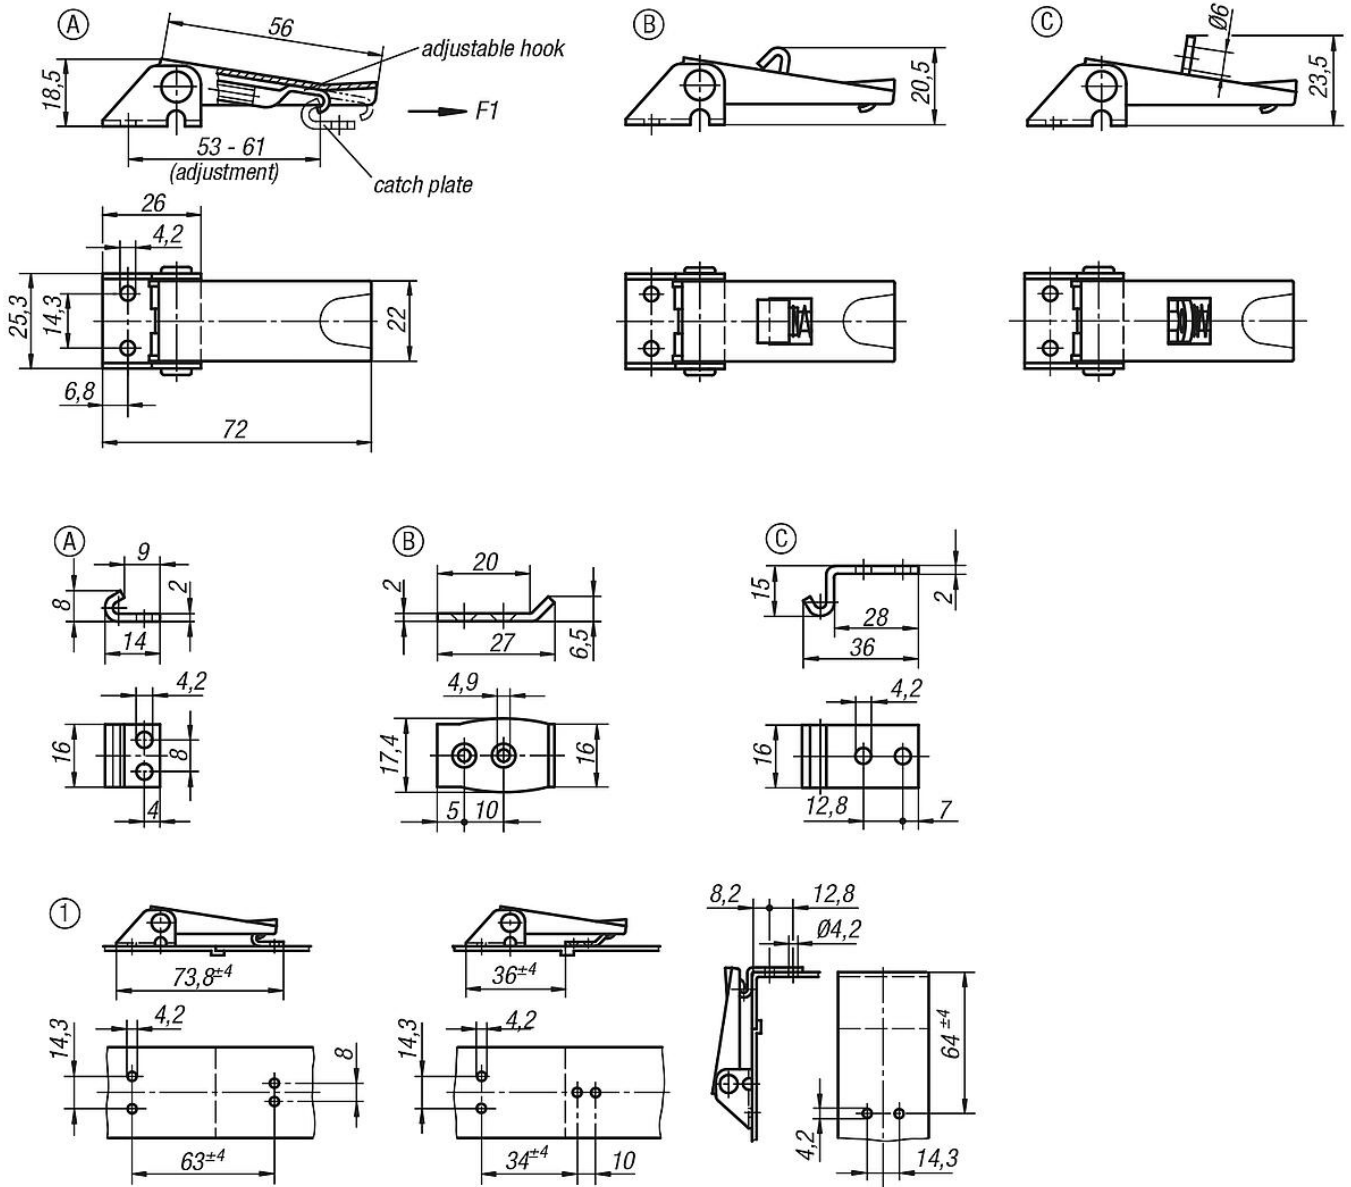

Overview of items

Latches adjustable, fastening holes accessible

Order No.	Main material	Form	Retaining force F1 N
K0046.1420721	steel	A	1000
K0046.1420722	stainless steel	A	1000
K0046.2420721	steel	B	1000
K0046.2420722	stainless steel	B	1000
K0046.3420721	steel	C	1000
K0046.3420722	stainless steel	C	1000
K0046.9142141	steel	A	-
K0046.9142142	stainless steel	A	-
K0046.9242271	steel	B	-
K0046.9242272	stainless steel	B	-
K0046.9342381	steel	C	-
K0046.9342382	stainless steel	C	-

